A.G.S Acoustic Materials Ltd

Suppliers of Noise Control Materials

AG-Damp B Data Sheet

1. Product	
Product Name:	AG-Damp B
Description:	Black Acoustic Damping Sheet

2. Product Coding	
AG-Damp B3:	3Kg/m²
AG-Damp B5:	5Kg/m²
AG-Damp B10:	10Kg/m²

3. Sheet Size	
Standard Untrimmed:	1500 x 1000mm

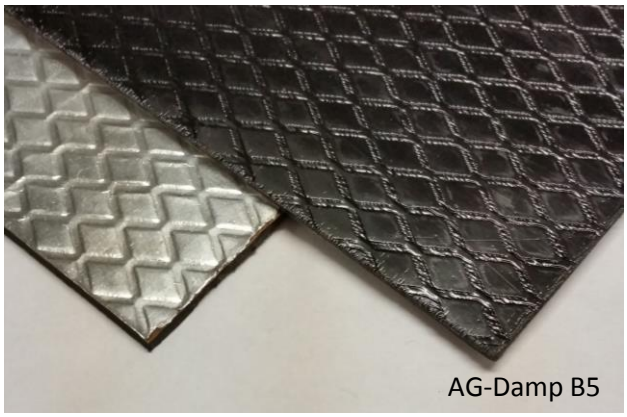

AG-Damp B5

4. Fire Rating	
Regulations:	FMVS 302(SE). Similar to BSAU 169a 1992 and ISO 3795 1985.

5. Applications
Used to counteract the drumming effect from sheet metal.

6. Full Description	
Description:	Bitumen based damping sheet with a self adhesive backing. Can be supplied in standard sheet form, or die cut to suit your particular requirements.

7. Storage and Handling	
Storage:	Store at room temperature. If subject to temperatures below 10°C, allow to stabilise at room temperature for several hours prior to use.
Handling:	Do not attempt to handle at below -5°C as this material will become brittle and break.

8. Installation	
Notes:	The self adhesive backing will satisfactorily bond at 18°C. However, the adhesion can be enhanced if the material is pre-heated to 30°C. Although this should be suitable for most applications, we would always recommend a mechanical fix. Particularly when adhering to the underside of a surface, where the weight of the product may weaken the bond. Painted or powder coated surfaces may also affect adhesion, and should be tested for suitability prior to use. This versatile material is easily cut with a Stanley knife.

9. Acoustic Performance

Hz	125	250	500	1000	2000	4000	
dB	15	19	23	28	33	38	**AG-Damp B5**
dB	20	24	29	34	39	43	**AG-Damp B10**

FOR FURTHER DETAILS PLEASE
CONTACT OUR SALES STAFF
TEL: 01664 411770
FAX: 01664 481190
EMAIL: sales@agsacousticmaterials.co.uk

16|18 DIGBY DRIVE
LEICESTER ROAD IND. ESTATE
MELTON MOWBRAY
LEICESTERSHIRE
LE13 0RQ