A.G.S Acoustic Materials Ltd

Suppliers of Noise Control Materials

AG-Double Slab Data Sheet

1. Product	
Product Name:	AG-Slab
Description:	A polymeric barrier bonded between to sheets of high density mineral wool slab.

2. Product Variants	
Barrier Layer:	5Kg/m² or 10Kg/m²
Overall Slab Thicness:	50mm, 75mm or 100mm
Slab Density:	60Kg/m³ or 80Kg/m³

3. Sheet Size	
Standard:	600mm x 1200mm

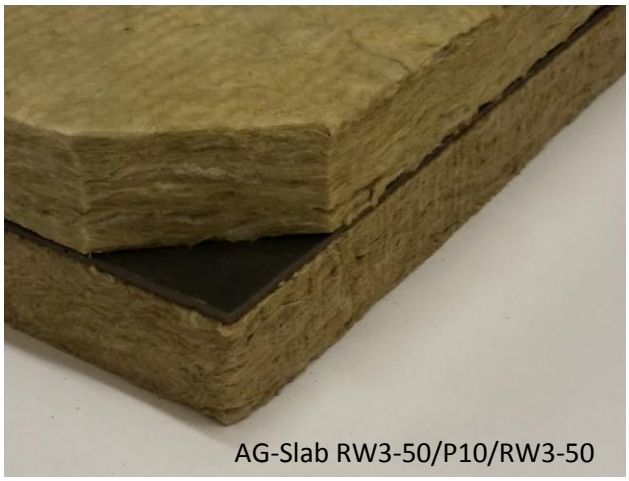

AG-Slab RW3-50/P10/RW3-50

4. Fire Rating	
Regulations:	Class '0'

5. Applications
AG-Slab is normally used as an acoustic infill to partition/studded walls and floor/ceiling voids.

6. Full Description	
Description:	A lamination of either 5Kg/m² or 10Kg/m² polymeric barrier with either a 25mm or 50mm fibreglass slab bonded to each side of the barrier.

7. Storage and Handling	
Storage:	No special precautions are required. Keep Dry.
Handling:	Gloves advised for general handling and fitting. Dust masks and goggles may be advisable if dust and fibres are being emitted.

8. Installation	
Notes:	Ensure a tight fit where possible, avoiding air gaps around or between slabs.

FOR FURTHER DETAILS PLEASE
CONTACT OUR SALES STAFF
TEL: 01664 411770
FAX: 01664 481190
EMAIL: sales@agsacousticmaterials.co.uk

16|18 DIGBY DRIVE
LEICESTER ROAD IND. ESTATE
MELTON MOWBRAY
LEICESTERSHIRE
LE13 0RQ