A.G.S Acoustic Materials Ltd

Suppliers of Noise Control Materials

AG-Lay Chip-Type Data Sheet

1. Product	
Product Name:	AG-Lay CH6/B10/CH6
Description:	A 10Kg/m² barrier sandwiched between 2 sheets of 9lb/m³ Chip-foam.

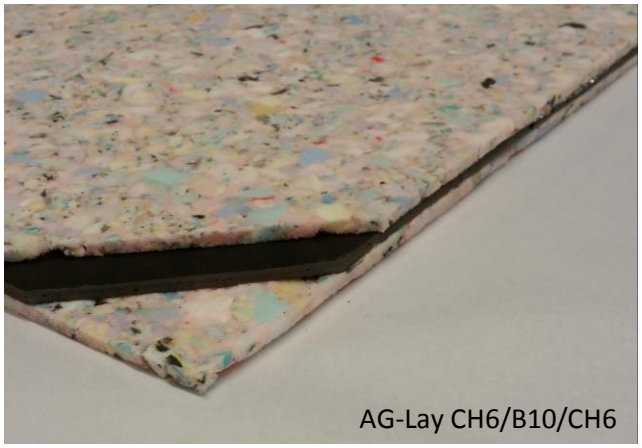
AG-Lay CH6/B10/CH6

2. Product Coding	
AG-Lay CH6/B10/CH6	6mm Chip-foam, 10Kg/m² barrier, 6mm Chip-foam,

3. Sheet Size	
Standard:	1200 x 600mm

4. Applications	
Applications:	AG-Lay is commonly used to reduce impact noise and improve airborne sound insulation in domestic, commercial and industrial areas.

5. Full Description	
Description:	An acoustic composite, comprising a layer of 10Kg/m² sound deadening damping barrier mat sandwiched between 2 sheets of 9lb/m³ chip-foam.

6. Storage and Handling	
Storage:	No special precautions are required.
Handling:	No special precautions are required.

7. Installation	
Notes:	Can be laid directly under carpets or floor coverings. AG-Lay can be bonded to the original floor, or left loose for easy access to the existing floor.

8. Acoustic Performance

TEST RESULTS PENDING

Hz	125	250	500	1000	2000	4000	
dB							
dB							
dB							

9. Regulatory Information	
Notes:	Complies to Building Regulations, Approved Document E (2003).

FOR FURTHER DETAILS PLEASE
CONTACT OUR SALES STAFF
TEL: 01664 411770
FAX: 01664 481190
EMAIL: sales@agsacousticmaterials.co.uk

16|18 DIGBY DRIVE
LEICESTER ROAD IND. ESTATE
MELTON MOWBRAY
LEICESTERSHIRE
LE13 0RQ