A.G.S Acoustic Materials Ltd

Suppliers of Noise Control Materials

AG-Single Slab Data Sheet

1. Product	
Product Name:	AG-Slab
Description:	Foil faced polymeric barrier with a high density mineral wool slab bonded to the back.

2. Product Variants	
Barrier Layer:	5Kg/m² or 10Kg/m²
Slab Thicness:	25mm, 40mm or 50mm
Slab Density:	60, 80 or 100Kg/m³

3. Sheet Size	
Standard:	600mm x 1200mm

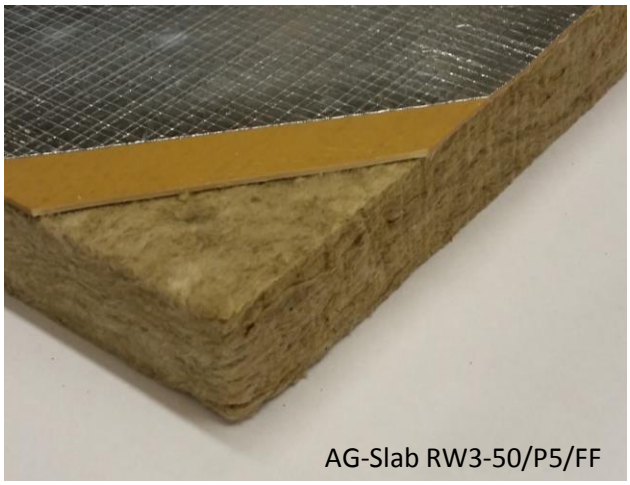

AG-Slab RW3-50/P5/FF

4. Fire Rating	
Regulations:	Class '0'

5. Applications
AG-Slab is normally fitted around square ducts or used as an acoustic lining in machine housings.

6. Full Description	
Description:	A lamination of either 5Kg/m² or 10Kg/m² foil faced barrier with 25mm 40mm or 50mm fibreglass slab bonded to none foiled face of barrier.

7. Storage and Handling	
Storage:	No special precautions are required. Keep Dry.
Handling:	Gloves advised for general handling. Dust masks and goggles may be advisable if dust and fibres are being emitted.

8. Installation	
Notes:	Joints should be sealed using AG-Lag Foil Tape. Mechanical fixings may be necessary.

FOR FURTHER DETAILS PLEASE
CONTACT OUR SALES STAFF
TEL: 01664 411770
FAX: 01664 481190
EMAIL: sales@agsacousticmaterials.co.uk

16|18 DIGBY DRIVE
LEICESTER ROAD IND. ESTATE
MELTON MOWBRAY
LEICESTERSHIRE
LE13 0RQ